




LED Bulb
LED Tube
LED Spotlight
LED Floodlight
LED Panel Light
LED Flexible Strip
LED Wall Wash Light

HUA KIA
2013

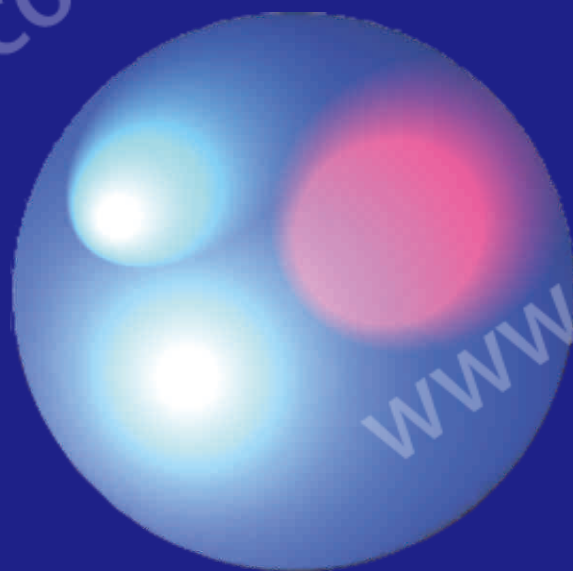

LED Spotlight

Item	Parameter
Cap-Base	E26,E27,MR16,GU5.3,GU10
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
LED	4x1W Ceramic 3535 CREE XP-E
Beam Angle	140°
Rated Luminous Flux	400lm
Color Rendering Index	> 85
Wattage	5W
Voltage	AC85V~245V,50~60Hz
Dimmable	No



Item	Parameter
Cap-Base	E26,E27,MR16,GU5.3,GU10
Rated Avg. Life	45000hr.
Color	Red, PureGreen, Blue
Beam Angle	30° , 60°
Rated Luminous Flux	R:40,Green:75,Blue:20 (lm)
Wattage	3W
Voltage	AC85V~245V,50~60Hz
RF Remote Control	Yes



Item	Parameter
Cap-Base	E26,E27,MR16,GU5.3,GU10
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
LED	5W COB
Beam Angle	140°
Rated Luminous Flux	500lm
Color Rendering Index	> 80
Wattage	7W
Voltage	AC85V~245V,50~60Hz
Dimmable	Yes



Item	Parameter
Cap-Base	E26,E27, GU10
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
Rated Luminous Flux	300lm
Wattage	3W
Voltage	AC85V~245V,50~60Hz

LED Bulb



Item	Parameter
Cap-Base	E26,E27, GU10
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
LED	5W COB
Beam Angle	140°
Rated Luminous Flux	500lm
Color Rendering Index	> 80
Wattage	7W
Voltage	AC85V~245V,50~60Hz
Dimmable	Yes



Item	Parameter
Cap-Base	E26,E27, GU10
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
LED	EMC PLCC3020 0.5W
Shell Material	Polymer nitride&Graphite thermal
Beam Angle	150°
Rated Luminous Flux	700lm
Color Rendering Index	> 80
Wattage	9W
Voltage	AC85V~245V,50~60Hz



Item	Parameter
Tube Size	T5
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
Available Length	600,900,1200,1500mm
LED Brand	0.2W SMD2835 with Epistar
Rated Luminous Flux	1600lm in 1200mm
Wattage	18W in1200mm
Voltage	AC85V~245V,50~60Hz
Ballast	No need



Item	Parameter
Tube Size	T8
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
Available Length	600,900,1200,1500mm
LED Brand	0.2W SMD2835 with Epistar
Rated Luminous Flux	2000lm in 1200mm
Wattage	18W in1200mm
Voltage	AC85V~245V,50~60Hz
Ballast	No need



Item	Parameter
Tube Size	T8
Rated Avg. Life	45000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
Available Length	600,900,1200,1500mm
LED Brand	0.2W SMD2835 with Epistar
Rated Luminous Flux	2000lm in 1200mm
Wattage	18W in1200mm
Voltage	AC85V~245V,50~60Hz
Ballast	No need
Body & Sound Sensor	Yes

LED Tube



Item	Parameter
Wattage	10W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	140°
LED Brand	COB 10W with Epistar
Rated Luminous Flux	1000lm
Voltage	AC85V~245V,50~60Hz
Water Proof	Ip65
Weight	500g



Item	Parameter
Wattage	100W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	140°
LED Brand	COB 100W with Epistar
Rated Luminous Flux	10000lm
Voltage	AC85V~245V,50~60Hz
Water Proof	Ip65
Weight	6000g


LED Floodlight



Item	Parameter
Wattage	160W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	140°
LED Brand	COB 4x40W with Epistar
Rated Luminous Flux	16000lm
Voltage	AC85V~245V,50~60Hz
Water Proof	Ip65
Weight	10000g




Item	Parameter
Wattage	18W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
LED Brand	PLCC 3014 with Epistar
Rated Luminous Flux	1200lm
Voltage	AC85V~245V,50~60Hz
Size	Ø300x 19mm
Available size	Ø145 , Ø180 , Ø240mm
Dimmable	Yes

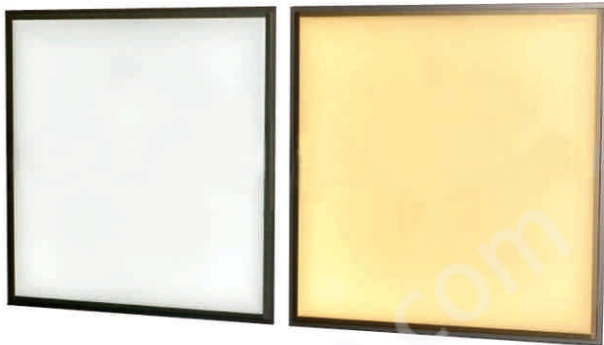

Item	Parameter
Wattage	60W
Available Wattage	30W, 36W, 40W, 48W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
LED Brand	PLCC 3014 with Epistar
Rated Luminous Flux	5000lm
Voltage	AC85V~245V,50~60Hz
Size	600x 600mm
Thickness	12.5mm
Available size	200X200mm,200x600mm, 300x300mm,300x600mm
Dimmable	Yes

LED Panel

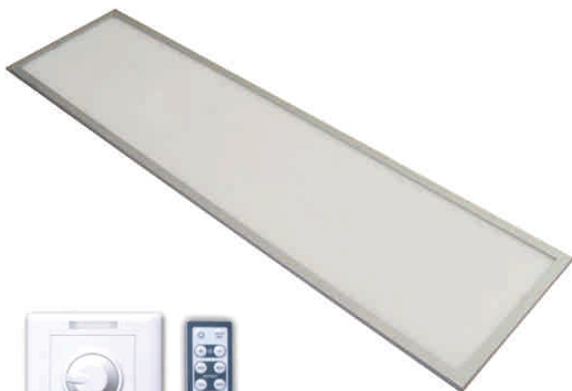

Item	Parameter
Wattage	78W
Available Wattage	55W, 70W
Rated Avg. Life	40000hr.
Color	3000K,4000K,6000K
Beam Angle	150°
LED Brand	PLCC 3014 with Epistar
Rated Luminous Flux	5500lm
Voltage	AC85V~245V,50~60Hz
Size	600x 1200mm
Thickness	12.5mm
Available size	625x625mm,300x1200mm, 300x1500mm
Dimmable	Yes



Item	Parameter
LED	High Lumen PLCC5050SMD
Available LED	PLCC335, 3014, 3528, 5630
LED Quantity	60pcs Per Meter
Available LED Quantity	30pcs, 48pcs, 120pcs, 240pcs
Rated Avg. Life	30000hr.
Color	3000K, 4000K, 6000K, R, G, B, Y
Beam Angle	120°
Voltage	DC12V, DC24V
Size	5meter Per Roll
Width	10mm
Dimmable	Yes
RF Remote Control	Yes



Item	Parameter
LED	High Lumen PLCC5050 RGB SMD
LED Quantity	48pcs Per Meter
Rated Avg. Life	30000hr.
Color	R, G, B,
Beam Angle	120°
Voltage	DC12V,
Size	5meter Per Roll
Width	15mm
Dimmable	Yes
RF Remote Control	Yes

LED Flexible Strip




Item	Parameter
Name	LED WiFi Controller
Polarity	Common Anode
Function	RGB, Color temperature, Dimming
Output	12V~24V, 3x4A
Operating Platform	>Android 2.1, >iOS 4.3
Dimmable	Yes
RF Remote Control	Yes



Item	Parameter
Wattage	30W
Rated Avg. Life	30000hr.
Color	White, RGB, Yellow, Blue, Green
Beam Angle	15° ,30° ,45° ,10x45° 20x60°
LED Brand	CREE 1W 120lm/W
Color effects	Chasing, Runing water, 256 gray scale, full-color
Voltage	AC85V~245V,50~60Hz
Controller	DMX512
Work Temperature	-20°C~+45°C
Water Proof	Ip65
Electrical safety class	DC24V 3class/AC220V 1class



Item	Parameter
Wattage	30W
Rated Avg. Life	30000hr.
Color	White, RGB, Yellow, Blue, Green
Beam Angle	15° ,30° ,45° ,10x45° 20x60°
LED Brand	CREE 1W 120lm/W
Color effects	Chasing, Runing water, 256 gray scale, full-color
Voltage	AC85V~245V,50~60Hz
Controller	DMX512
Work Temperature	-20°C~+45°C
Water Proof	Ip65
Electrical safety class	DC24V 3class/AC220V 1class

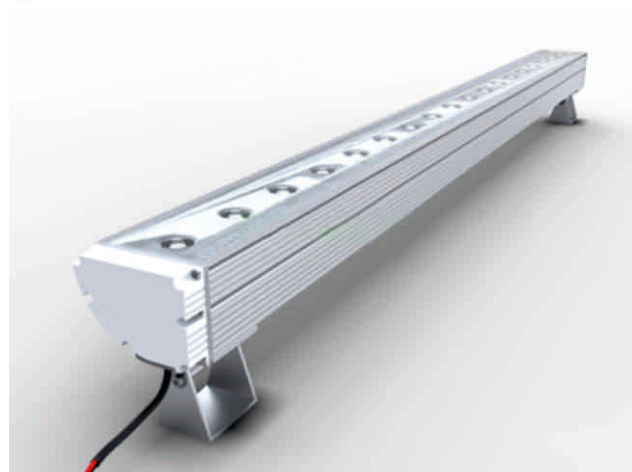

Item	Parameter
Wattage	36W
Rated Avg. Life	30000hr.
Color	White, RGB, Yellow, Blue, Green
Beam Angle	15° ,30° ,45° ,10x45° 20x60°
LED Brand	CREE 1W 120lm/W
Color effects	Chasing, Runing water, 256 gray scale, full-color
Voltage	AC85V~245V,50~60Hz
Controller	DMX512
Work Temperature	-20°C~+45°C
Water Proof	Ip65
Electrical safety class	DC24V 3class/AC220V 1class



www.huakia.com

www.huakia.com

www.huakia.com

www.huakia.com

HUAKIA Optoelectronic Co., Limited

Address: Building 10, 3rd Industrial Zone, Tangtou, Shiyan Town, Bao An District,
Shenzhen, P.R.China

Tel:(0086) 755 2640 2393

Fax:(0086) 755 2640 5204

Postcode: 518108

Http://www.huakia.com

Email: sales@huakia.com