




Application:

Lights for billboards, architectures, parking areas, docks, parks, tree decorations, sculpture parks, plazas, squares, buildings facade or other outdoor lighting.

Main Parameter:


Lumens:80-90LM/W
Voltage:AC85-265V
Shape:Visor/Flat
Beam Angle:30-120degree
Material:Diecasting Aluminum
CCT:CW/WW/NW/G/B/R/RGB
Finishing Color:Black/Grey
Parts:Spike or Plate
Wire:0.3M or customized 1-3M
Chip:COB or High Power
IP Grade:IP65
Certificate:CE Rohs
Life Span:50000Hours
Warranty:2 Years
Working Temperature: -40~45°C

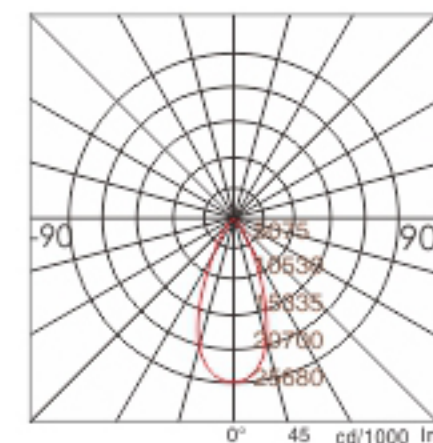

LED GARDEN LIGHT
LED 插地灯



HK-CD43CA
Size:Ø43 x 190mm
Watt:1 x 3W/5W 8585chips

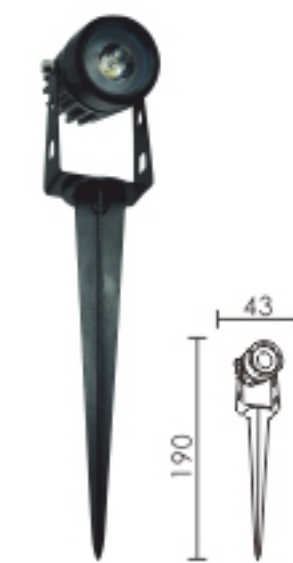


HK-CD43CB
Size:Ø43 x 190mm
Watt:1 x 3W/5W 8585chips




HK-CD43CC
Size:Ø43 x 190mm
Watt:3 x 1W High power chips



HK-CD43CD
Size:Ø43 x 190mm
Watt:3W/5W COB chips

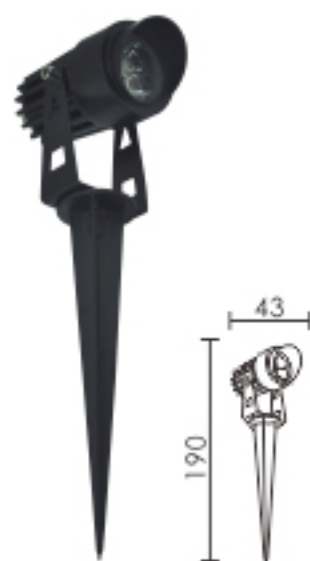


HK-CD43CE
Size:Ø43 x 190mm
Watt:3 x 1W High power chips

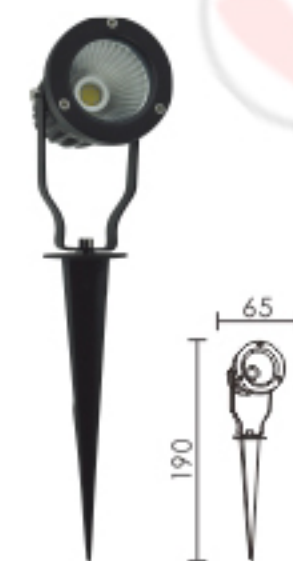


HK-CD65C1
Size:Ø65 x 190mm
Watt:5W/7W COB



HK-CD65C01
Size:65 x 190mm
Watt:3W/5W COB

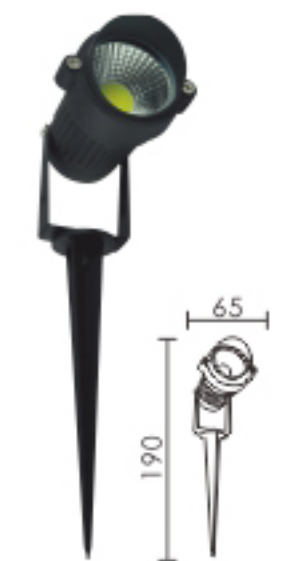


HK-CD65C02
Size:65 x 190mm
Watt:3W/5W COB

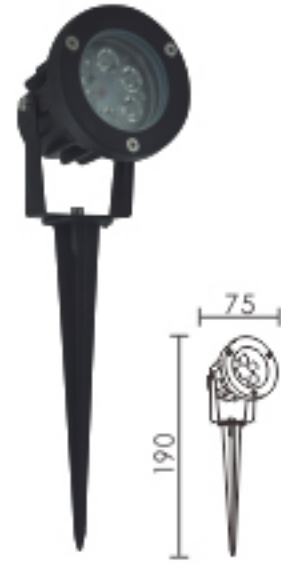

HK-CD75S01
Size:Ø75×190mm
Watt:3W/5W/7W SMD



HK-CD75C03
Size:Ø75×190mm
Watt:3W/5W/7W COB

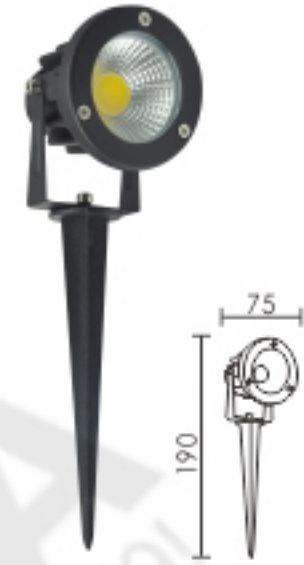

HK-CD75C01
Size:75×190mm
Watt:3W/5W/7W COB



HK-CD75C02
Size:Ø75×190mm
Watt:3W/5W/7W COB



HK-CD100C01
Size:Ø100×200mm
Watt:10W COB



HK-CD100C02
Size:Ø100×200mm
Watt:10W COB



HK-CD75T2
Size:Ø75×200mm
Watt:10W COB



HK-CD75T1
Size:Ø75×110mm
Watt:10W COB



HK-CD140C01
Size:Ø140×315mm
Watt:15W/20W COB



HK-CD98C01
Size:Ø98×200mm
Watt:5W/7W COB



HK-CD98C02
Size:Ø98×200mm
Watt:3W RGB
MR16/GU10/E27



HK-CD84C
Size:Ø84×393mm
Watt:5W/7W COB



HK-CD84P
Size:Ø84×393mm
Watt:5W/7W COB



HK-CD146B1
Size:Ø146×300mm
Watt:10W/15W COB



HK-CD146B2
Size:Ø146×300mm
Watt:10W/15W COB



HK-CD146W1
Size:Ø146×50mm
Watt:10W/15W COB



HK-CD146W2
Size:Ø146×50mm
Watt:10W/15W COB




HK-CD95L
Size:Ø95×245mm
Watt:10W COB





HK-CD115L
Size:Ø115×245mm
Watt:20W COB



HK-CD150L
Size:Ø150×245mm
Watt:30W COB

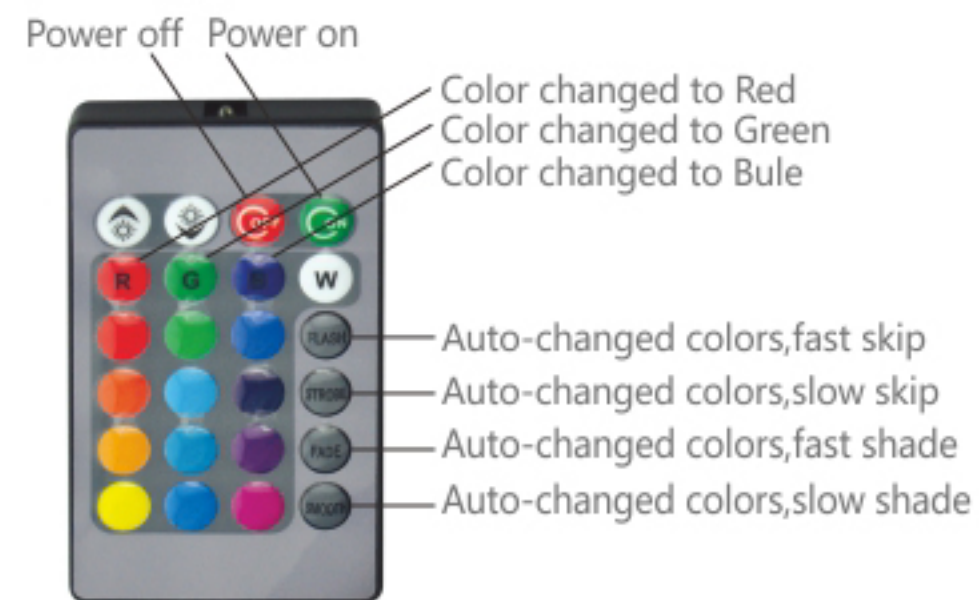

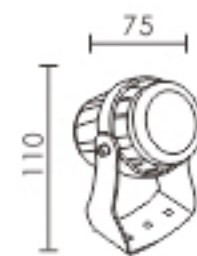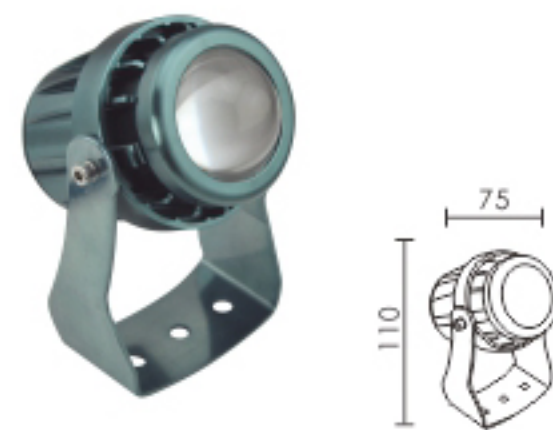


HK-CD75S

Size: $\varnothing 75 \times 80 \times 110$ mm
Watt: 5W/10W



HK-CD70

Size: $\varnothing 70 \times 110$ mm
Watt: 1 x 10W

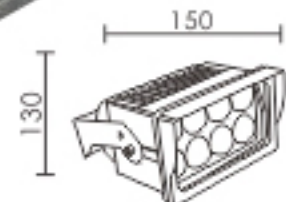


HK-CD150

Size: $\varnothing 150 \times 130$ mm
Watt: 24W




HK-CD65C2

Size: $\varnothing 65 \times 165$ mm
Watt: 2 x 5W




HK-CD88

Size: $\varnothing 88 \times 120$ mm
Watt: 7 x 1W

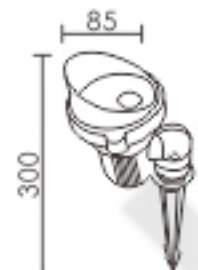

HK-CD85

Size: $\varnothing 85 \times 300$ mm
Watt: 3 x 1W

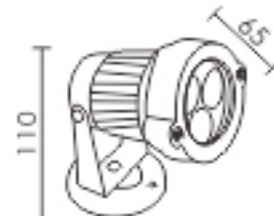

HK-CD65P

Size: $\varnothing 65 \times 110$ mm
Watt: 3 x 1W



HK-CD65CX

Size: $\varnothing 65 \times 190$ mm
Watt: 3 x 1W



HK-CD75C

Size: $\varnothing 75 \times 190$ mm
Watt: 3 x 1W




HK-CD75P

Size: $\varnothing 75 \times 120$ mm
Watt: 3 x 1W



HK-CD125C

Size: $\varnothing 125 \times 300$ mm
Watt: 6 x 1W

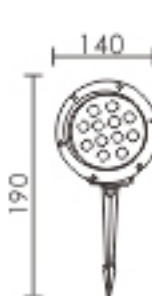


HK-CD140C

Size: $\varnothing 140 \times 190$ mm
Watt: 9 x 1W/12 x 1W



HK-CD100C

Size: $\varnothing 100 \times 200$ mm
Watt: 5 x 1W




HK-CD126P

Size: $\varnothing 126 \times 150$ mm
Watt: 7 x 1W




HK-CD140CX

Size: $\varnothing 140 \times 190$ mm
Watt: 9 x 1W/12 x 1W

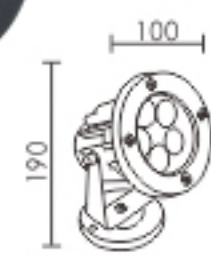


HK-CD100P01

Size: $\varnothing 100 \times 190$ mm
Watt: 5 x 1W



HK-CD155C/P

Size: $\varnothing 155 \times 190$ mm
Watt: 9 x 1W/12 x 1W

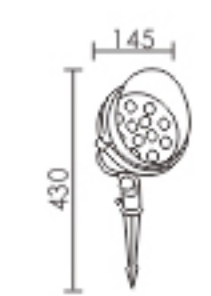

HK-CD145C

Size: $\varnothing 145 \times 430$ mm
Watt: 9 x 1W/12 x 1W

LED UNDERGROUND LIGHT FEATURE

- 1.High power LED with built-in constant current led driver IP65 grade.
- 2.Input voltage AC220V/DC12V/24V,high lumens.
- 3.304#/316# Stainless steel housing with pre-fixing case,easy for installation.
- 4.No risk of mercury emission,environmental friendly,low consumption and safe.
- 5.Applications:garden,theme park,square,club,,etc.
- 6.DMX/RGB inner control way/Single color is available.



COB LED UNDERGROUND LIGHT
COB LED 地埋灯




编号 Item No.	功率 Power	产品尺寸 Size	开孔尺寸 Open Size	内孔 Inner diameter	输入电压 Input Voltage	色温 CCT	材料 Specification
HK-DMC100-5W	5W	100×110mm	80×110mm	50mm	AC85-265V/DC12-24V		
HK-DMC150-10W	10W	150×110mm	140×110mm	102mm	AC85-265V/DC12-24V		
HK-DMC180-10W	10W	180×110mm	160×110mm	115mm	AC85-265V/DC12-24V		
HK-DMC180-20W	20W	180×90mm	160×90mm	127mm	AC85-265V	WW3000K	Stainless steel surface +Aluminum+Glass Ip65 Grade 不锈钢面+压铸铝灯体+钢化玻璃 IP65防水
HK-DMC200-20W	20W	200×90mm	180×90mm	127mm	AC85-265V	NW4000K	
HK-DMC200-30W	30W	200×110mm	180×110mm	145mm	AC85-265V	CW6000K	
HK-DMC220-30W	30W	220×90mm	200×90mm	153mm	AC85-265V		Lux光效:90-100lm/W
HK-DMC250-40W	40W	250×110mm	230×110mm	190mm	AC85-265V		Chips Brand:Epistar35mil(晶元)
HK-DMC300-50W	50W	300×100mm	280×100mm	240mm	AC85-265V		

HIGH POWER LED UNDERGROUND LIGHT
大功率LED地埋灯



编号 Item No.	功率 Power	产品尺寸 Size	开孔尺寸 Open Size	输入电压 Input Voltage	材料 Specification	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size(cm)
单色White/Warmwhite/Red/Yellow/Blue/Green								
HK-DM65-1W	1W	Ø65×H60mm	Ø55mm			0.3	50	47×19.5×37
HK-DM100-3W	3W	Ø100×H80mm	Ø80mm			0.5	30	49×28×37
HK-DM120-5W	5W	Ø120×H95mm	Ø100mm			0.75	16	42×33×33
HK-DM150-6W	6W	Ø150×H95mm	Ø130mm			0.8	16	42×33×33
HK-DM150-7W	7W	Ø150×H95mm	Ø130mm			0.9	16	42×33×33
HK-DM150-9W	9W	Ø150×H95mm	Ø130mm			1.2	12	42×33×33
HK-DM180-9W	9W	Ø180×H95mm	Ø160mm	AC85-265V	Stainless steel surface +Aluminum+Glass Ip65 Grade 不锈钢面+压铸铝灯体+钢化玻璃 IP65防水	1.3	14	57×39×22
HK-DM180-12W	12W	Ø180×H95mm	Ø160mm	DC12-24V		1.3	12	57.5×39×22
HK-DM180-15W	15W	Ø180×H95mm	Ø160mm		Lux光效:90-100lm/W	1.6	10	57.5×39×22
HK-DM200-15W	15W	Ø200×H95mm	Ø185mm		Chips Brand:Epistar35mil(晶元)	1.8	10	53×24×46
HK-DM200-18W	18W	Ø200×H95mm	Ø185mm			2.3	16	42×42×42
HK-DM220-21W	21W	Ø220×H95mm	Ø205mm			2.5	10	53×24×46
HK-DM220-24W	24W	Ø220×H95mm	Ø240mm			2.8	10	52×46.5×24
HK-DM300-36W	36W	Ø300×H90mm	Ø290mm			4	6	63×32×32

编号 Item No.	功率 Power	产品尺寸 Size	开孔尺寸 Open Size	输入电压 Input Voltage	材料 Specification	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size(cm)
RGB Inner Control(七彩内控)								
HK-DM100-C3W	3W	Ø100×H80mm	Ø70mm			0.5	16	49×28×37
HK-DM150-C6W	6W	Ø150×H95mm	Ø140mm			0.8	16	42×33×33
HK-DM180-C9W	9W	Ø180×H95mm	Ø150mm			1.2	12	42×33×33
HK-DM180-C12W	12W	Ø180×H95mm	Ø150mm	AC85-265V	Stainless steel surface +Aluminum+Glass Ip65 Grade	1.3	12	57.5×39×22
HK-DM200-C15W	15W	Ø200×H95mm	Ø205mm	DC12-24V	不锈钢面+压铸铝灯体+钢化玻璃 IP65防水	1.8	10	57.5×39×22
HK-DM200-C18W	18W	Ø200×H95mm	Ø205mm			2.3	16	42×33×33
HK-DM250-C24W	24W	Ø250×H95mm	Ø240mm			2.8	8	52×46.5×24
HK-DM300-C36W	36W	Ø300×H95mm	Ø290mm			4	6	63×32×32

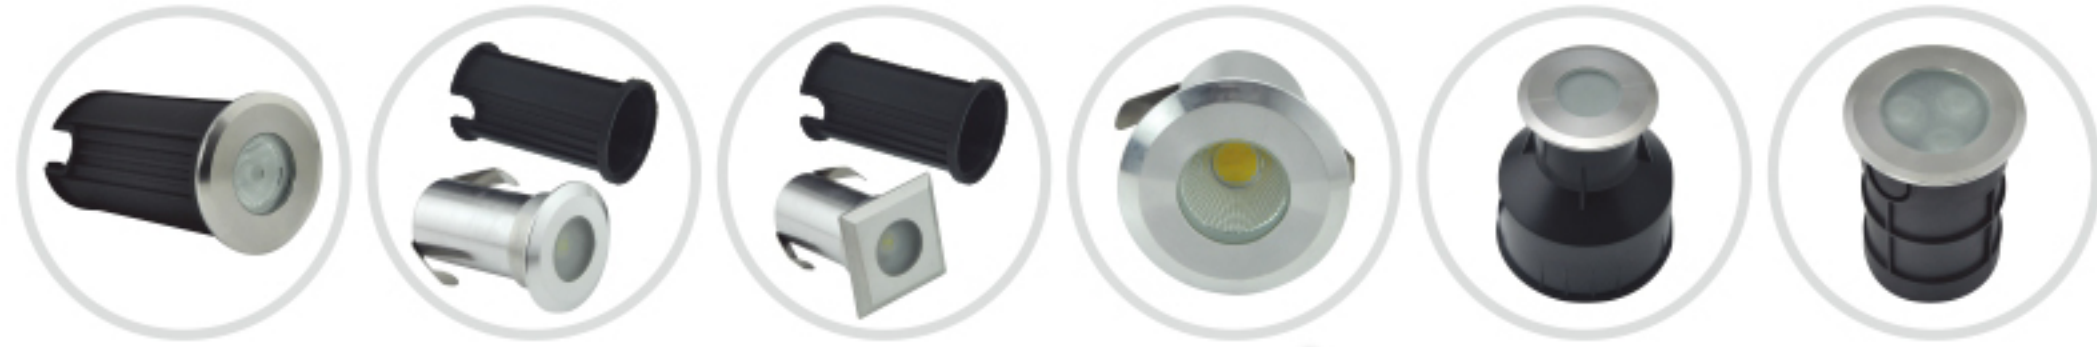

编号 Item No.	功率 Power	产品尺寸 Size	开孔尺寸 Open Size	输入电压 Input Voltage	材料 Specification	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size (cm)
单色White/Warmwhite/Red/Yellow/Blue/Green								
HK-DMR42	1W	Ø42×H80mm	Ø16mm	AC85-265V	Aluminum+Glass IP65 Grade	0.15	100	29×29×43
HK-DMS42	1W	Ø42×H80mm	Ø16mm	DC12-24V	车铝+钢化玻璃 IP65防水 Lux光效:90-100lm/W	0.15	100	29×29×43
HK-DMR52	1/2/3W	Ø52×H100mm	Ø27mm		Chips Brand:Epistar35mail(晶元)	0.18	100	29×29×48.5
HK-DMRS42	1W	Ø42×H80mm	Ø16mm			0.22	100	29×29×43
HK-DMSS42	1W	Ø42×H80mm	Ø16mm		304 Stainless steel + Glass IP68 Grade	0.22	100	29×29×43
HK-DMS42-G	2W	Ø42×H80mm	Ø16mm	AC85-265V	304不锈钢灯体+钢化玻璃 IP68防水	0.22	100	29×29×43
HK-DM52	1W/3W	Ø52×H100mm	Ø27mm	DC12-24V	Lux光效:90-100lm/W	0.35	100	29×29×48.5
HK-DM62	1W/3W	Ø62×H10mm	Ø35mm		Chips Brand:Epistar35mail(晶元)	0.41	100	33.5×33.5×48.5
HK-DM75	3W	Ø75×H80mm	Ø50mm			0.48	50	53.5×22×41.5

型号意义: HK-DMRS42, HK-DM(地理灯首字母)-R(代表形状圆形Round)-S(代表材质不锈钢Stainless steel)-42(代表直径)




LED IP68 UNDERGROUND LIGHT
LED 水底地埋灯

编号 Item No.	功率 Power	产品尺寸 Size	开孔尺寸 Open Size	输入电压 Input Voltage	材料 Specification	色温 CCT	装箱数 Pcs/ctn	装箱尺寸 Outer Size (cm)
HK-DM100-S3W	3W	Ø100×H80mm	Ø70mm				30	49×28×27
HK-DM120-S5W	5W	Ø120×H95mm	Ø100mm		Stainless steel surface and housing+Glass IP68 Grade		16	42×33×33
HK-DM150-S6W	6W	Ø150×H95mm	Ø140mm				16	42×33×33
HK-DM150-S7W	7W	Ø150×H95mm	Ø140mm	AC85-265V	不锈钢面盖和灯体+钢化玻璃 IP68	WW3000K	16	42×33×33
HK-DM150-S9W	9W	Ø150×H95mm	Ø140mm	DC12-24V	防水(可直接放下水底)	NW4000K	12	42×33×33
HK-DM180-S9W	9W	Ø180×H95mm	Ø160mm		Lux光效: 90-100lm/W	CW6000K	14	57×39×22
HK-DM180-S12W	12W	Ø180×H95mm	Ø160mm		Chip Brand:Epistar35mail(晶元)		12	57.5×39×22
HK-DM180-S15W	15W	Ø180×H95mm	Ø160mm				10	57.5×39×22

LED STEP LIGHT
LED 墙角灯




1. Apply to those places where need a little light. It only emits a small amount of light, won't influence other people. So it not only satisfy the need of lighting but energy saving.
2. Mainly installed in stairs both indoor and outdoor, coner, bridge, parks, plazas etc.

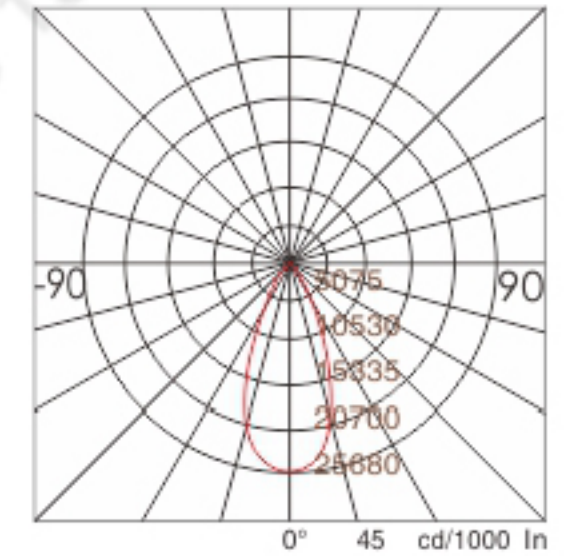


HK-SP-86
Size: 86×86mm
Watt: 1.5W/2.5W SMD/COB
Material: Plastic
IP Grad: IP20
CCT: 3000K/4000K/6000K


HK-SP-95
Size: 95×95mm
Watt: 1.5W/2.5W SMD/COB
Material: Plastic
IP Grad: IP20
CCT: 3000K/4000K/6000K

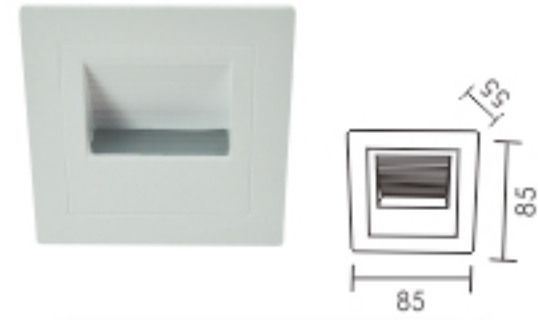


HK-SP-85
Size: 85 × 85 × H55mm
Open Size: 155 × 95mm
Watt: 2W

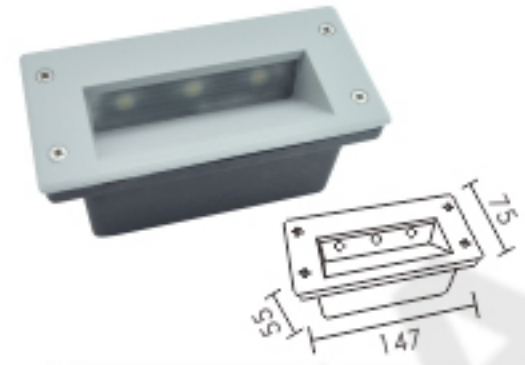


HK-SP-147
Size: 147 × 75 × H55mm
Open Size: 142 × 71mm
Watt: 3W

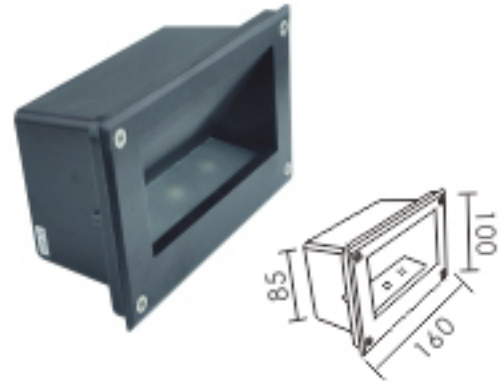


HK-SP-160
Size: 160 × 100 × H85mm
Open Size: 155 × 95mm
Watt: 3W

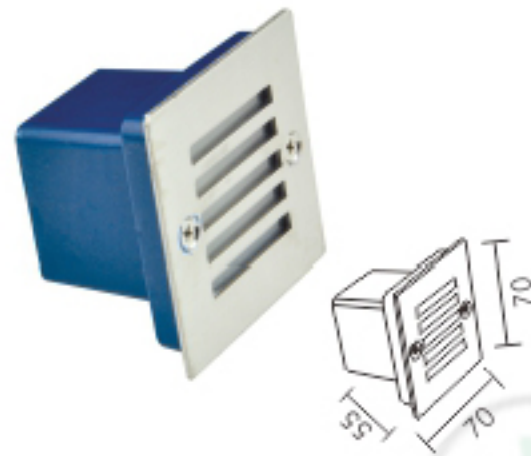


HK-SP-70A
Size: 70 × 70 × H55mm
Open Size: 65 × 65mm
Watt: 1W/2W

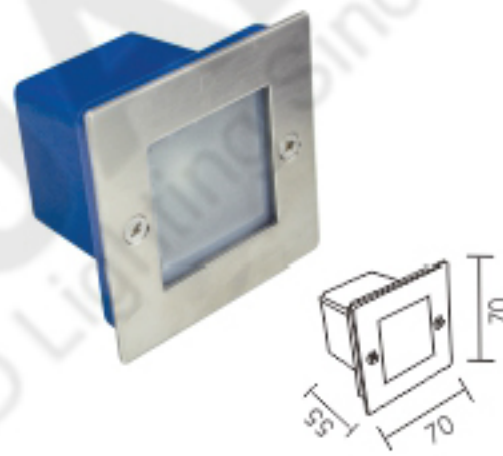


HK-SP-70B
Size: 70 × 70 × H55mm
Open Size: 65 × 65mm
Watt: 1W/2W

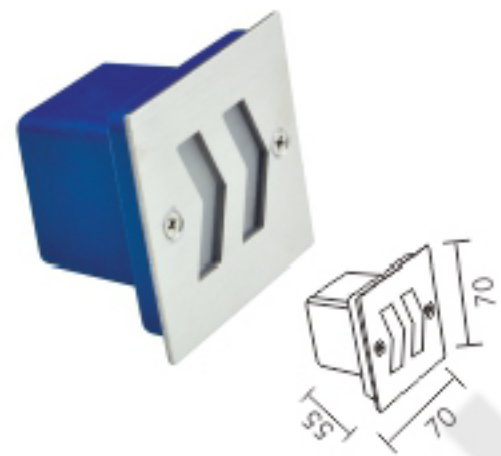


HK-SP-70C
Size: 70 × 70 × H55mm
Open Size: 65 × 65mm
Watt: 1W/2W

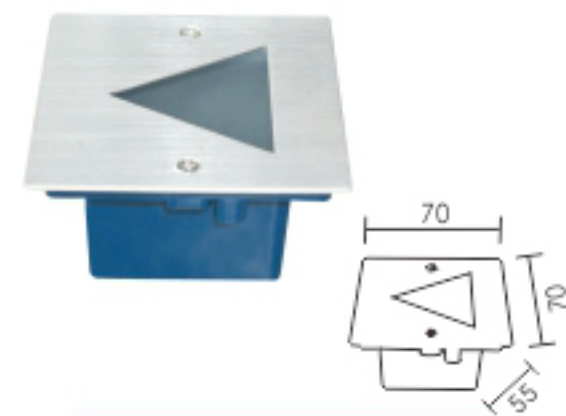

HK-SP-70D
Size: 70 × 70 × H55mm
Open Size: 65 × 65mm
Watt: 1W/2W

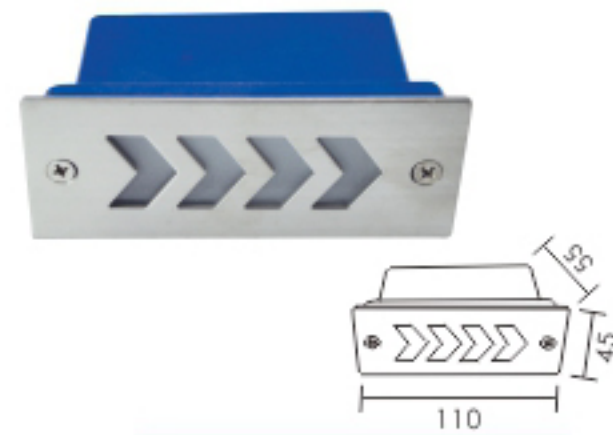


HK-SP-110A
Size: 110 × 45 × H55mm
Open Size: 105 × 41mm
Watt: 2W/3W

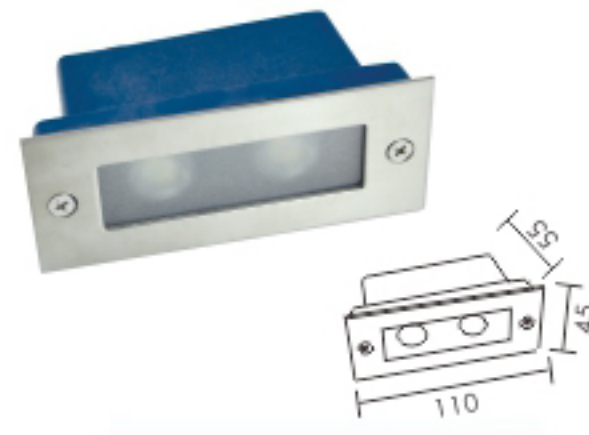

HK-SP-110B
Size: 110 × 45 × H55mm
Open Size: 105 × 41mm
Watt: 2W/3W

Huakia Lighting


Huakia Lighting

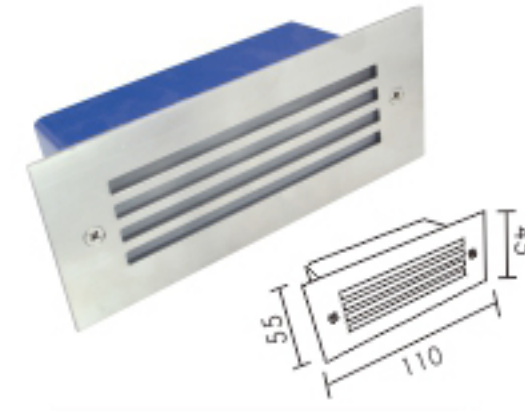


HK-SP-110C
Size: 110 × 45 × H55mm
Open Size: 105 × 41mm
Watt: 2W/3W



HK-SP-170A
Size: 170 × 70 × H55mm
Open Size: 156 × 55mm
Watt: 3W

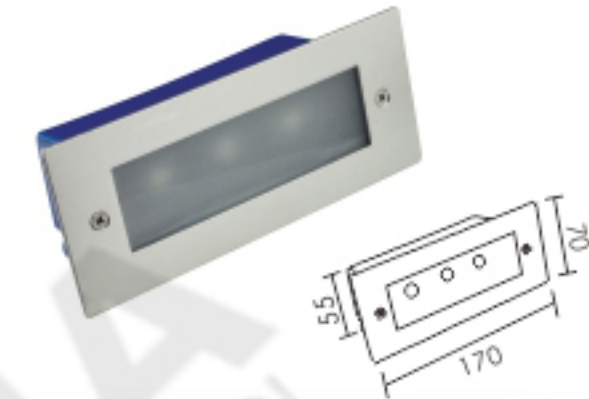


HK-SP-170B
Size: 170 × 70 × H55mm
Open Size: 156 × 55mm
Watt: 3W

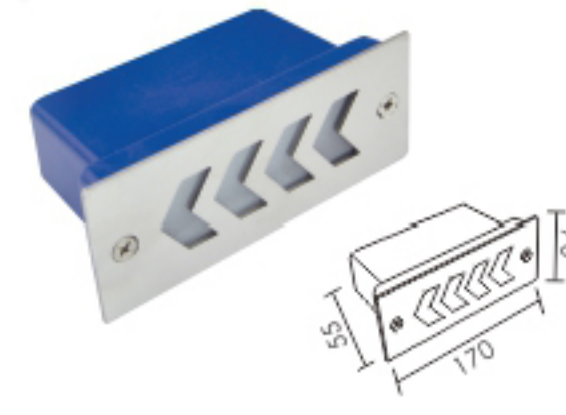


HK-SP-170C
Size: 170 × 70 × H55mm
Open Size: 156 × 55mm
Watt: 3W



HK-SP-170D
Size: 170 × 70 × H55mm
Open Size: 156 × 55mm
Watt: 3W

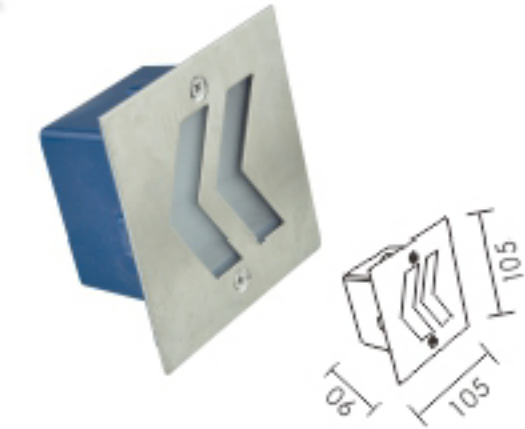


HK-SP-105A
Size: 105 × 105 × H90mm
Open Size: 95 × 95mm
Watt: 4W

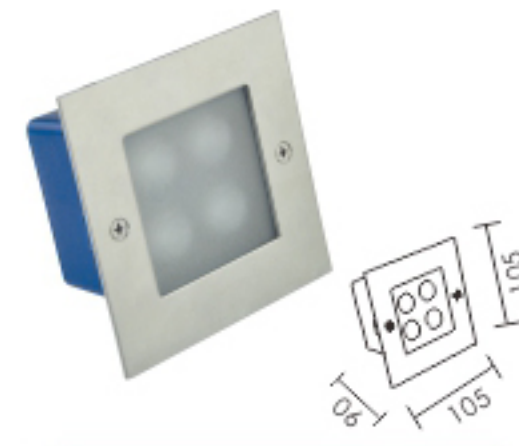

HK-SP-105B
Size: 105 × 105 × H90mm
Open Size: 95 × 95mm
Watt: 4W



HK-SP-105C
Size: 105 × 105 × H90mm
Open Size: 95 × 95mm
Watt: 4W

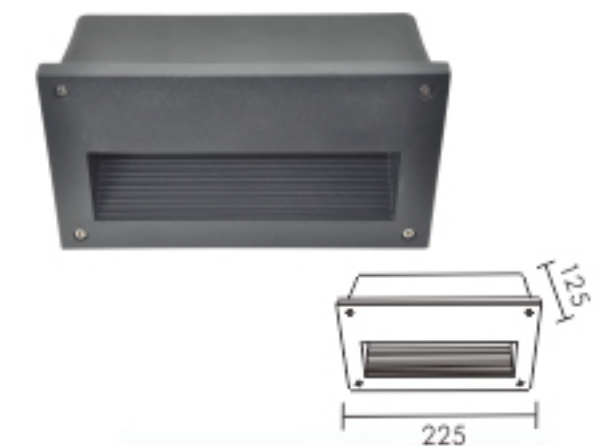

HK-SP-225
Size: 225 × 125mm
Open Size: 125 × 125mm
Watt: 5W



Notes

- 1.All voltage are AC/DC12V or 24V,AC220V is not available
- 2.we suggest to make RGB lights in AC,as DC will be not synchronous
- 3.Chips are Epistar brand for 3000/4000/6000K,Epileds for G/B/R/RGB
- 1.电压不完全通用，售前请咨询
- 2.单色产品可以做AC/DC通用
- 3.RGB一般只做AC，做DC无法同步
- 4.本产品指定为12V/24V，不能做高压
- 5.单色光为晶元，RGB光为光宏芯片
- 6.12W以上常规电压是24V，12V需要定做

Huakia Lighting

Huakia Lighting

LED POOL LIGHT
泳池灯



HK-YC245
Size:Ø245×50mm
Watt:9W/12W
Material:Plastic



HK-YC260
Size:Ø260×50mm
Watt:12W/15W
Material:Plastic



HK-YC295
Size:Ø295×50mm
Watt:15W/18W
Material:Plastic



HK-YC230
Size:Ø230×50mm
Watt:9W/12W/15W
Material:Stainless steel



HK-YC290
Size:Ø290×50mm
Watt:18W/24W
Material:Stainless steel



HK-YC230S
Size:Ø230×50mm
Watt:12W
Material:Stainless steel



HK-YC290S
Size:Ø290×50mm
Watt:18W
Material:Stainless steel



LED水底灯又称为LED水下灯，是水底灯的一种，简单的指就是装在水底下的灯，外观小而精致，美观大方，外形和有些地埋灯差不多，只是多了个安装底盘，底盘是用螺丝固定。因为LED水底灯是用水底下面，需要承受一定的压力，所以一般是采用不锈钢材料，8-10MM钢化玻璃、优质防水接头、硅胶橡胶密封圈，弧形多角度折射强化玻璃、防水、防尘、防漏电、耐腐蚀。

Features

- 1,50000h Life span,2 years warranty.
- 2,unique optical design, no light pollution, glare-free, uniform light field, no strobe
- 3,IP68,stainless steel,8-10mm tempered glass,waterproof connectors and silicone rubber sealing ring.
- 4,For safe,only low voltage 12V/24V are available,constant current driver, security, stability, reliability
- 5,We suggest to use wax-sealing method to install underwater lights
- 6,Application:swimming pool light,music fountain light,square light,bar and etc



LED UNDERWATER LIGHT
LED 水底灯

编号 Item No.	子编号 Extend	参数 Spec	输入电压 Input Voltage	灯珠品牌 LED Brand	发光角度 Beam Angle	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size(cm)
RGB Inner Control/DMX512(七彩内控/外控)								
HK-SD80C	-3IN -3DMX	Ø80×H150mm				0.3	45	49×28×37
HK-SD120C	-6IN -6DMX	Ø120×H155mm	AC/DC 12V AC/DC 24V			0.6	16	42×33×33
HK-SD145C	-9IN -9DMX -12IN -12DMX	Ø145×H155mm	AC12V AC/DC 24V DC12V Can be customized	光宏Epileds	15° /30° /45° /60° /90°	1	14	42×35×35
HK-SD160C	-12IN -12DMX	Ø160×H155mm				1.2	14	42×35×35
HK-SD180C	-15IN	Ø180×H155mm	AC/DC 24V			1.5	12	42×42×42
HK-SD190C	-18IN -18DMX	Ø190×H155mm	12V Can be customized			1.8	12	42×42×42

型号意义: HK-SD65S, HK-SD(水底灯首字母)-65(代表直径尺寸)-S(代表单色)
HK-SD80C-3IN, HK-SD(水底灯首字母)-80(代表直径尺寸)-C(代表彩色), -3(功率), -IN(内控)DMX(DMX512控制方式)



LED 水底灯
LED UNDERWATER LIGHT




WHITE WARM WHITE RED GREEN BLUE RGB

编号 Item No.	子编号 Extend	参数 Spec	输入电压 Input Voltage	灯珠品牌 LED Brand	发光角度 Beam Angle	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size(cm)
单色White/Warmwhite/Neutral white/Red/Yellow/Blue/Green								
HK-SD65S	-1W -3W	Ø65×H150mm				0.3	50	63×26×47
HK-SD80S	-3W	Ø80×H150mm	AC/DC 12V	晶元Epistar 35 mil 普瑞Bridgelux 45 mil 100LM/W	15° /30° /45° /60° /90°	0.3	45	49×28×37
HK-SD120S	-6W	Ø120×H150mm	AC/DC 24V			0.9	16	42×33×33
HK-SD145S	-9W	Ø145×H155mm				1	14	42×35×35
HK-SD160S	-12W	Ø160×H155mm				1.2	14	42×35×35
HK-SD180S	-15W	Ø180×H155mm	AC/DC 24V DC 24V			1.4	12	42×42×42
HK-SD190S	-18W	Ø190×H155mm	AC12V Unavailable			1.6	12	42×42×42

型号意义: HK-SD65S, HK-SD(水底灯首字母)-65(代表直径尺寸)-S(代表单色)

LED FOUNTAIN LIGHT
LED 喷泉灯

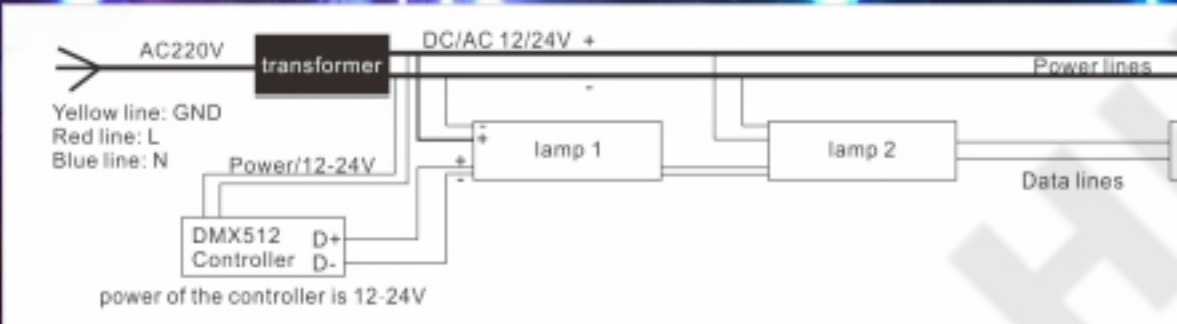


编号 Item No.	子编号 Extend	参数 Spec	输入电压 Input Voltage	灯珠品牌 LED Brand	发光角度 Beam Angle	重量 G/W(kg)	装箱数 Pcs/ctn	装箱尺寸 Outer Size(cm)
HK-PQ130S/C	-6W -6IN -6DMX	Ø130×H90mm	AC/DC 24V DC 24V AC24V Unavailable	晶元Epistar 35 mil 普瑞Bridgelux 45 mil 100LM/W 光宏Epileds	15° /30° /45° /60° /90°	1.1	30	43×28×42
HK-PQ160S/C	-9W -9IN -9DMX	Ø160×H90mm				1.5	14	42×35×35
HK-PQ180S/C	-12W -12IN -12DMX	Ø180×H90mm	AC/DC 12V Unavailable DC 24V AC24V	晶元Epistar 35 mil 普瑞Bridgelux 45 mil 100LM/W 光宏Epileds	15° /30° /45° /60° /90°	1.8	12	57×39×22
HK-PQ200S/C	-15W -15IN -15DMX	Ø200×H90mm				1.9	16	42×42×42
HK-PQ245S/C	-18W -18IN -18DMX	Ø245×H90mm				2.1	12	42×42×42

型号意义: HK-PQ130S,PQ(喷泉首字母)-130(代表直径尺寸)-S(代表单色)
HK-PQ130C-6IN/DMX,PQ(喷泉首字母)-130(代表直径尺寸)-C(代表七彩)-6(代表功率)-IN(内控)-DMX(DMX外控)

LED WALL WASHER LIGHT
LED 洗墙灯

"LED Wallwasher light Application: Apply to exterior walls, the staircase profiles, bridges, river embankment, garden Plaza, wall wash light casting and outline sketch, but also can be used for entertainment space, indoor light rendering "

"Features for led wallwasher light:Lamp shells of high-quality aluminum, anodized surface. Elegant and delicate light body, excellent heat dissipation. Tempered glass lamp body and silicone rubber seals, internal epoxy potting to ensure excellent waterproof performance.Lamp light source of imported high-power ultra-bright LED lamp beads, in built constant current power supply, stable performance to ensure stable performance. The use of optical-grade PMMA lamp lens, 8,25,35,45,60-degree which can choose to achieve optical effects Lamp voltage available: 24V, 110V, 220V "

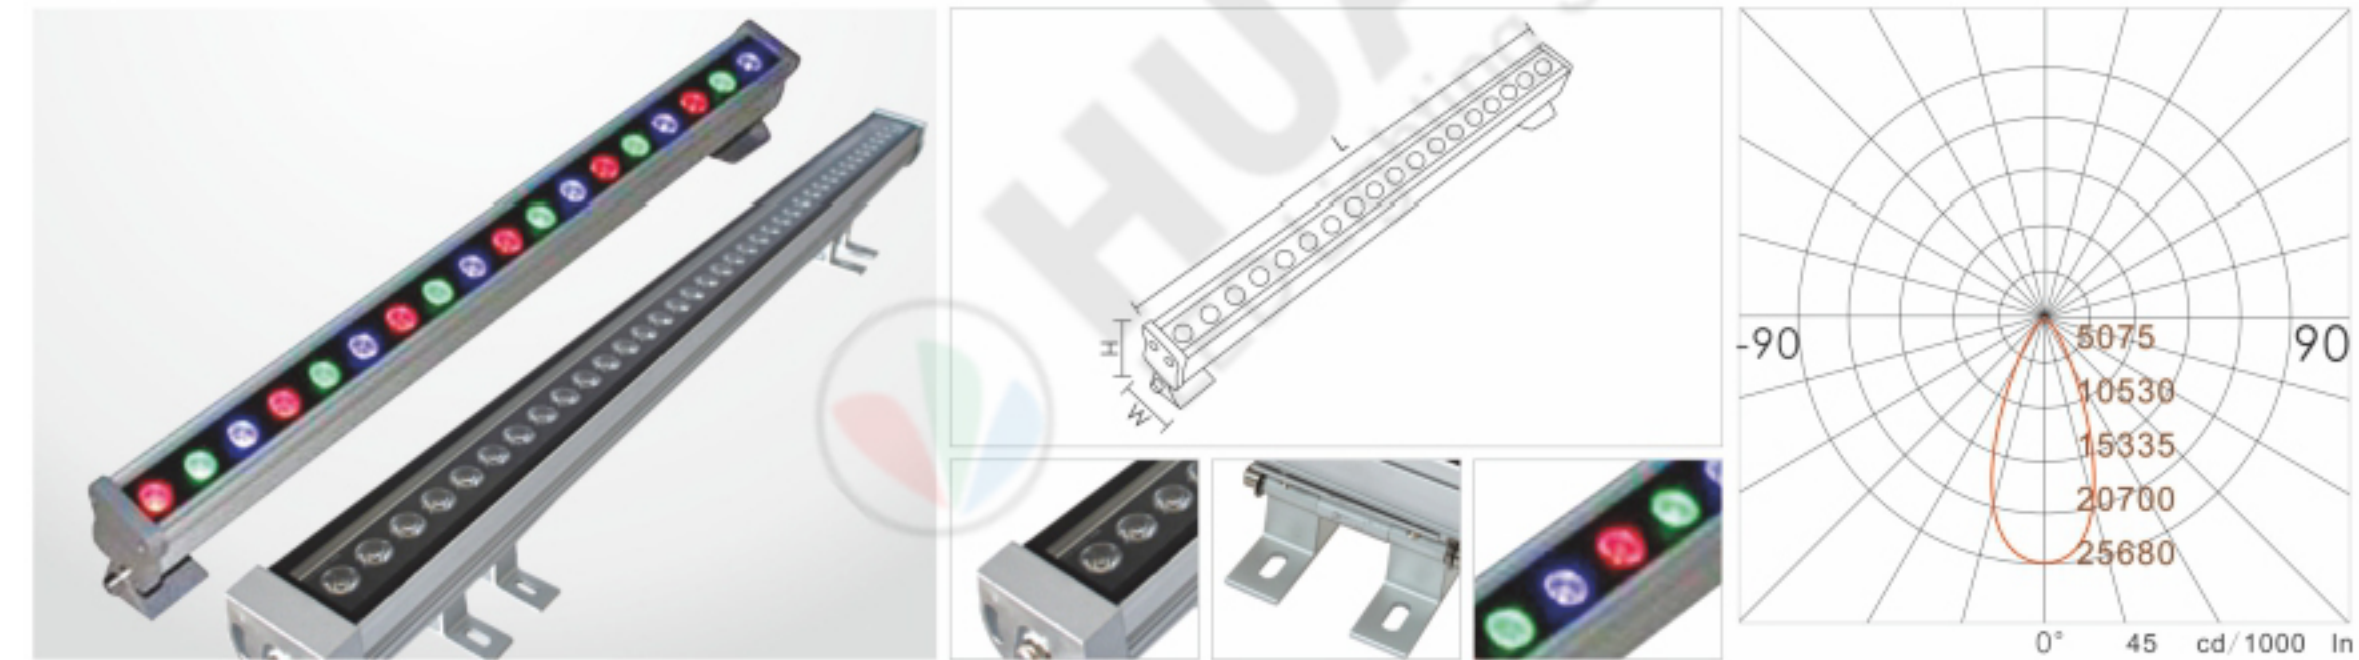


尺寸Size:W46×H46×L1000mm

产品型号 Item No.	色温 CCT	功率 Power	输入电压 Input Voltage	详细参数 Description	毛重/个 GW/pcs	个/箱 Pcs/ctn	外箱尺寸 Carton Size
HK-XQ4646-12W	Single Color (Red, Yellow, Blue, Green)	12W	24V/220V	Chip Type:Epstar LEDs:12/15/18/24leds Lumious:100-110LM/W	1.3GS	20	103.5×34×34cm
HK-XQ4646-15W		15W	24V/220V	LED Color:White/Warmwhite/R/G/B	1.5GS	20	103.5×34×34cm
HK-XQ4646-18W		18W	24V/220V	Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	1.7GS	20	103.5×34×34cm
HK-XQ4646-24W	RGB	24W	220V	Material:Alumium IP Grade:IP65	1.9GS	20	103.5×34×34cm
HK-XQ4646-C12W		12W	24V/220V	Chip Type:Epileds LEDs:12/15/18/24leds Lumious:100-110LM/W	1.3GS	20	103.5×34×34cm
HK-XQ4646-C15W		15W	24V/220V	LED Color:R/G/B changeable	1.5GS	20	103.5×34×34cm
HK-XQ4646-C18W		18W	24V/220V	Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	1.7GS	20	103.5×34×34cm
HK-XQ4646-C24W		24W	24V/220V	Material:Alumium IP Grade:IP65	1.9GS	20	103.5×34×34cm



尺寸Size:W50×H60×L1000mm

产品型号 Item No.	色温 CCT	功率 Power	输入电压 Input Voltage	详细参数 Description	毛重/个 GW/pcs	个/箱 Pcs/ctn	外箱尺寸 Carton Size
HK-XQ5060-18W	Single Color (Red, Yellow, Blue, Green)	18W	24V/220V	Chip Type:Epstar LEDs:18/24/36leds Lumious:100-110LM/W	2.2GS	20	103.5×34×34cm
HK-XQ5060-24W		24W	24V/220V	LED Color:White/Warmwhite/R/G/B Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	2.4GS	20	103.5×34×34cm
HK-XQ5060-36W		36W	24V/220V	Material:Alumium IP Grade:IP65	2.6GS	20	103.5×34×34cm
HK-XQ5060-C18W	RGB	18W	220V	Chip Type:Epileds LEDs:18/24/36leds Lumious:100-110LM/W	2.2GS	20	103.5×34×34cm
HK-XQ5060-C24W		24W	24V/220V	LED Color:R/G/B changeable Beam angle:30° /45° /60° /90° /120°	2.4GS	20	103.5×34×34cm
HK-XQ5060-C36W		36W	24V/220V	Material:Alumium IP Grade:IP65	2.6GS	10	105×36×30cm

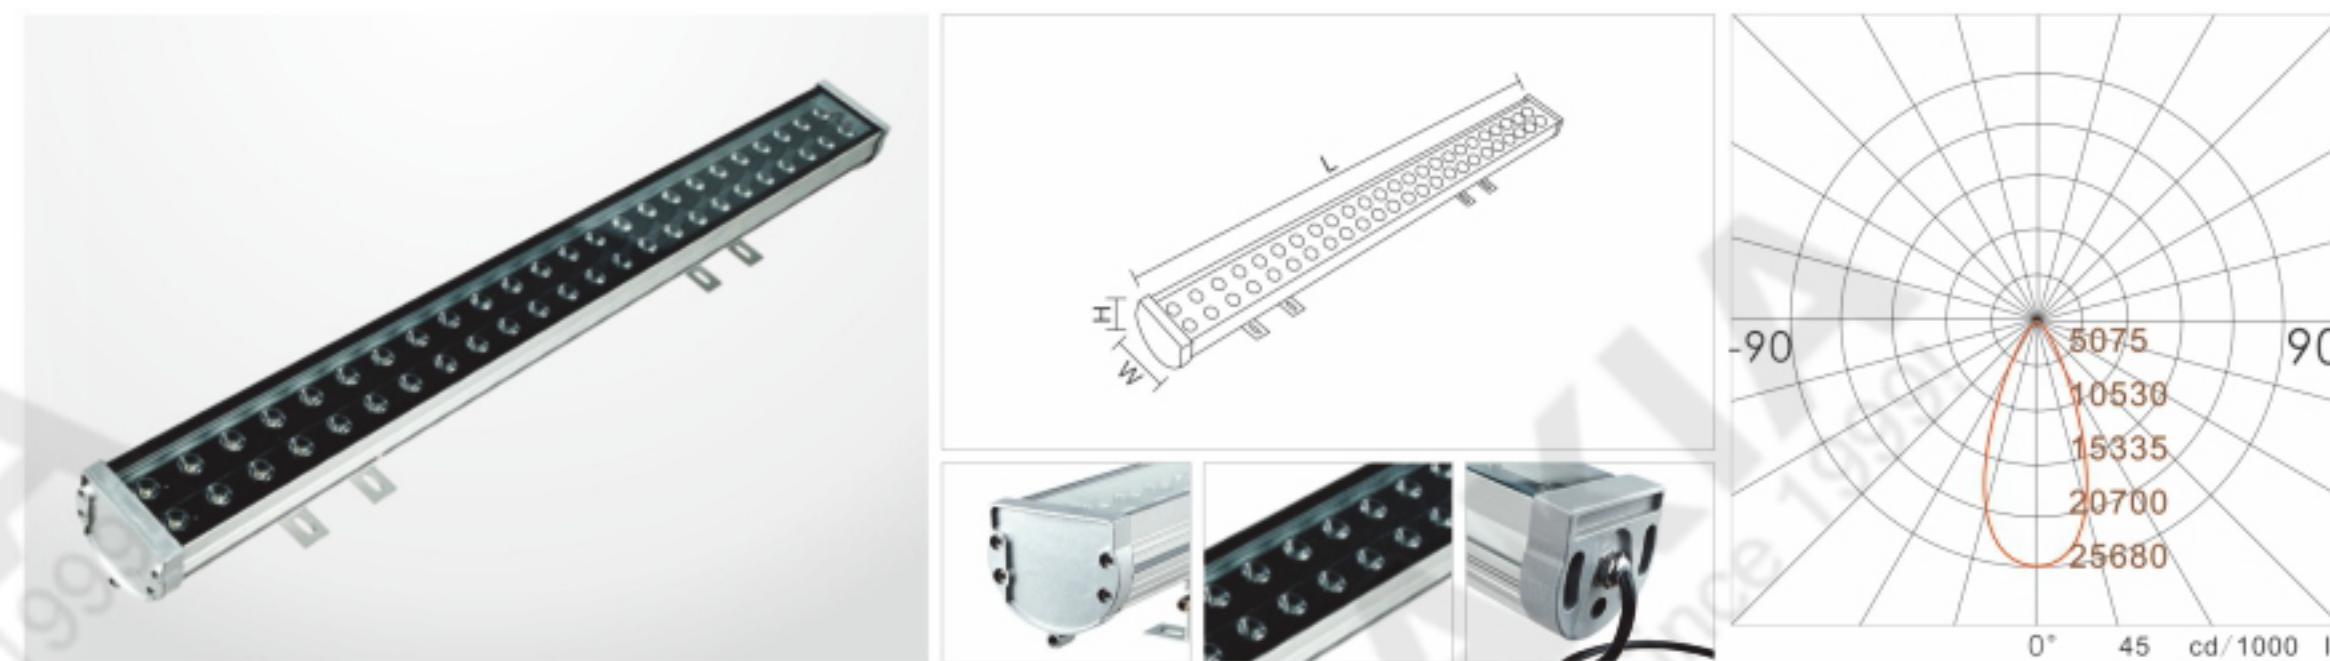

尺寸Size:W72×H66×L1000mm

产品型号 Item No.	色温 CCT	功率 Power	输入电压 Input Voltage	详细参数 Description	毛重/个 GW/pcs	个/箱 Pcs/ctn	外箱尺寸 Carton Size
HK-XQ7266-36W	Single Color (Red, Yellow, Blue, Green)	36W	24V/220V	Chip Type:Epstar LEDs:36/48leds(2×18/2×24) Lumious:100-110LM/W	3.0GS	8	106×36×23cm
HK-XQ7266-48W		48W	24V/220V	LED Color:White/Warmwhite/R/G/B Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	3.4GS	8	106×36×23cm
HK-XQ7266-C36W	RGB	36W	24V/220V	Chip Type:Epileds LEDs:36/48leds(2×18/2×24) Lumious:100-110LM/W	3.0GS	8	106×36×23cm
HK-XQ7266-C48W		48W	24V/220V	LED Color:R/G/B changeable Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	3.4GS	8	106×36×23cm

尺寸Size:W92×H70×L1000mm

产品型号 Item No.	色温 CCT	功率 Power	输入电压 Input Voltage	详细参数 Description	毛重/个 GW/pcs	个/箱 Pcs/ctn	外箱尺寸 Carton Size
HK-XQ9270-48W	Single Color (Red, Yellow, Blue, Green)	48W	24V/220V	Chip Type:Epstar LEDs:36/48leds(2×18/2×24) Lumious:100-110LM/W	3.6GS		
HK-XQ9270-72W		72W	24V/220V	LED Color:White/Warmwhite/R/G/B Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	3.9GS		
HK-XQ9270-C48W	RGB	48W	24V/220V	Chip Type:Epileds LEDs:36/48leds(2×18/2×24) Lumious:100-110LM/W	3.6GS		
HK-XQ9270-C72W		72W	24V/220V	LED Color:R/G/B changeable Beam angle:30° /45° /60° /90° /120° Material:Alumium IP Grade:IP65	3.9GS		